

## STANDARD EQUIPMENT

- 420 mm (16-1/2") carbide tipped saw blade .
- Pneumatic twin horizontal & vertical clamps .
- Air gun .
- User's manual

## OPTIONAL EQUIPMENT


- Infeed & outfeed table
- Pneumatic spray mist lubrication system

## SPECIFIC FEATURES





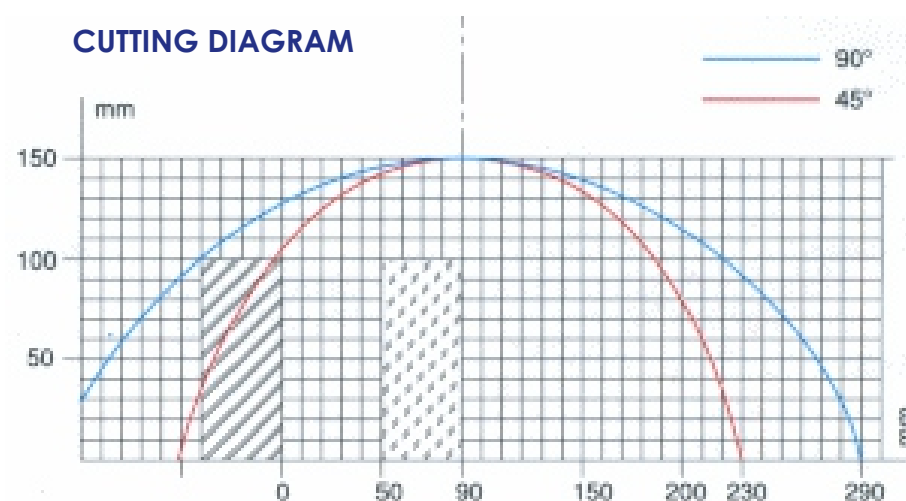


- Heavy duty construction for long machine life.
- Hydro-pneumatic saw blade feed.
- The movable back fence enables to cut bigger profiles both straight and miter cut.
- When the cutting process is finished the saw blade moves down to its starting point automatically.
- If the top guard is opened during the cutting process, the saw blade moves down automatically for safety reasons.
- Fixed angle adjustments at 15°, 22.5°, 30°, 45° and 90° via lock pin.
- Intermediate angles are adjusted via mechanical stop.
- The rising speed of the saw blade can be adjusted as required.



## CUTTING DIAGRAM



## TECHNICAL TABLE

 3 HP 3-Ph. 220v/440v 60Hz	 3000 RPM	 D: 16.5 d: 30-32 mm	 6-8 Bar (90-120 psi) 0.4 CFM	 60 lt./dak. Lt./min.	 35"x33"x51"	 495 lbs
--	---	---	---	--	---	--