




**TECHNICAL SPECIFICATIONS**

- 1 x saw at bottom (vertical) with Ø 550 mm (22") and 1 x saw at the top (horizontal) with Ø 500 dia. (20")
- Semi-automatic sawing unit with adjustable feeding speed and linear guides
- Indication cutting angles of the saw blades and pivoting angles of the back fence (opt)
- 3 x vertical and horizontal pneumatic clamps
- Cast iron and steel construction of the body that is strong and lasting
- Pneumatic guard with UL, CSA, CE compatible locking switch
- Two-hand safety module
- Motor brake system for both saw blades
- Both saw blades can be swiveled via a worm drive with a crank handle to mitre
- Manual adjustment of profile resting mechanism with analog display on the hand wheel
- Compensation for saw blade wear is easy to adjust
- Interior LED lighting
- Chip collection pan
- Pneumatic spray mist lubrication system





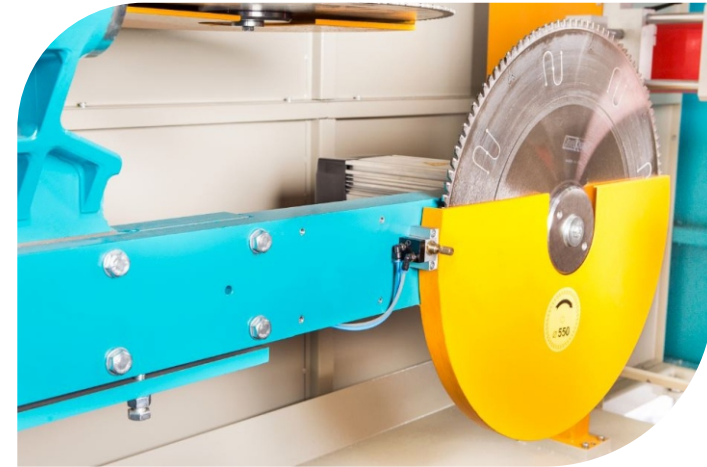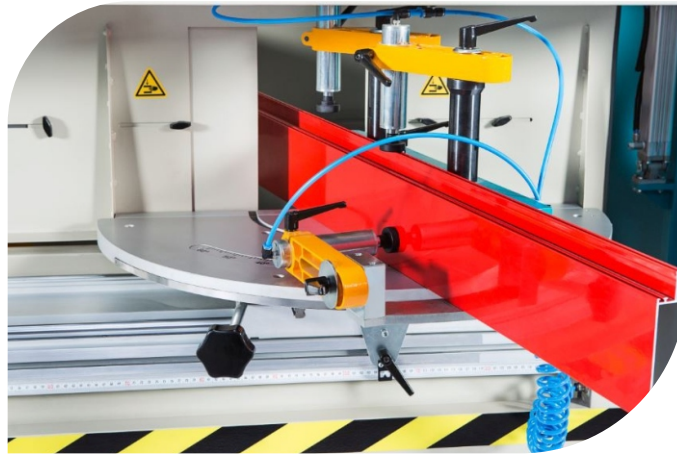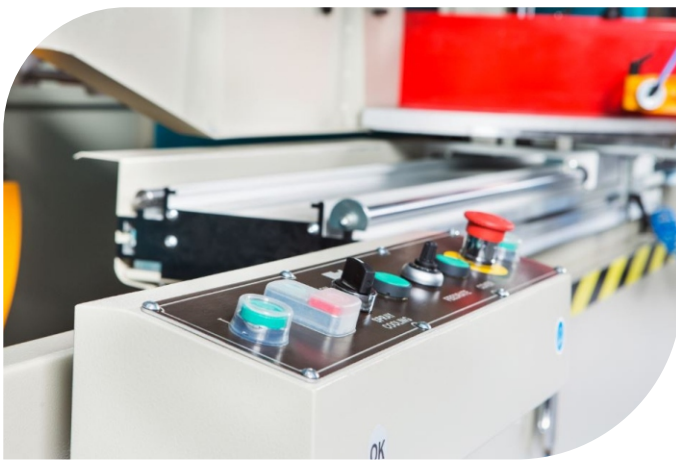


**OPTIONAL**

- Laser indication for vertical and horizontal cutting line
- Digital display unit showing the tilting and pivoting angles of both saw blades and table
- Spare saw blades



**TECHNICAL TABLE**

 2 x 2.2 kW 1x 1.5 kW	 6 kW 220V-440V 3P-50/60Hz	 6-8 Bar (90-120 psi) 2 Lt./min	 1500x 3200 1900 mm (59"x126"x75")	 1350 kg (2,970 lbs)	 1250 kg (2750 lbs)
--	---	---	---	---	--