



ZIGMA-02 AP: Full Automatic Double Head Miter Saw 16.5" (420 mm) - Computerized

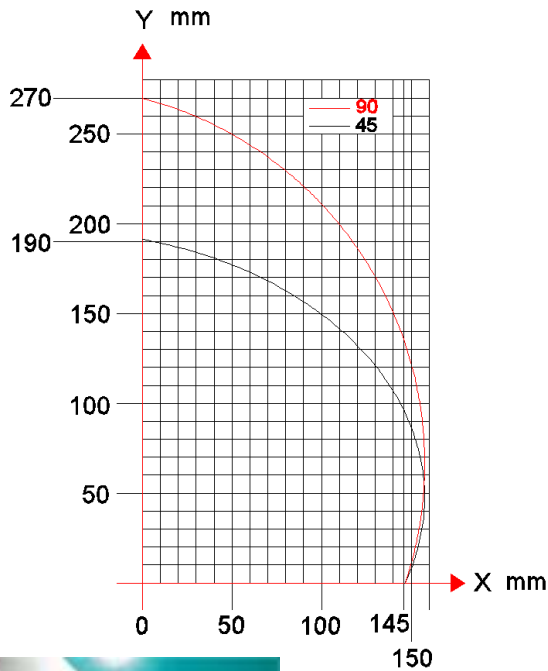

At 90°	At 45°
Min. 8"	Min. 17"
Max. 164"	Max. 164"

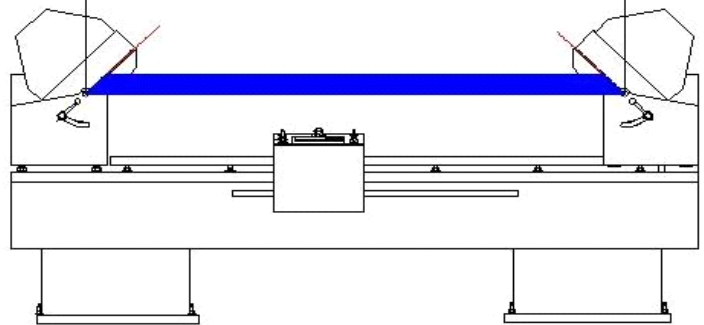

Sample Computer Screen

ALARM	CEMAL ABI	12992 - 1807
WARN	00-0000	CART 1
	Zendow Kanat Pr.(60)	PLACE 1
	000000000001260	

PRINTER IS READY

DATABASE CUTTING	INF.	<	1	>	PRINTER AUTOMATIC
SINGLE	MACHINE READY				PRINTER
MANUAL TRANSFER	LENGTH	600,0	583,4	STOP	
LEFT MOTOR START	LEFT ANGLE	0	DIFF. ANGLE	RIGHT MOTOR START	
LEFT MOTOR STOP	RIGHT ANGL	0	DIFF. ANGLE	RIGHT MOTOR STOP	
	IS CUT	CUT AGAIN	RESET DATABASE		
SLICING	MANUAL MOVEMENT	PRINTER	SELECT	GO TO THE MEASUREMENT	



ATechMachinery.com

309 Ridgmont Ave., Rockville, MD 20850 – USA
 Ph.: +1-240-505-1967 Fax: +1-301-560-6627
info@ATechMachinery.com

ZIGMA-02 AP: Full Automatic Double Head Miter Saw 16.5" (420 mm) - Computerized



Technical Features

- ✓ Ø 16.5" (420 mm) Full Automatic Double Head Mitre Saw designed for straight and angle cutting of vinyl and aluminum profiles
- ✓ Hydro-pneumatic saw blade feed with variable speed control to suit different profiles & materials
- ✓ Two hand safety operation of saw head feeding is interlocked with the pneumatic clamping of the workpiece
- ✓ Saw heads can be operated together for use as a double mitre saw or individually for use as a single mitre saw
- ✓ Mobile right hand saw head is equipped with a pneumatic brake system which is automatically activated at the beginning of the cutting cycle
- ✓ Adjustable cutting speed (saw blade feed)
- ✓ Pneumatically operated overhead safety guarding for both saw heads
- ✓ Conveyor attached to the right hand mobile saw head
- ✓ Saw complies with CE, UL & CSA Safety Directives
- ✓ Windows based computer system
- ✓ Profile details are entered via USB Flash Drive
- ✓ Half-finished product cutting
- ✓ Equipped with modem for online technical support

Standard Equipment

- ✓ 2 x Ø 16.5" (420 mm) saw blades
- ✓ Barcode printer
- ✓ Air Gun
- ✓ Additional conveyor system on moveable saw head
- ✓ Pneumatic clamps
- ✓ User's manual

Optional Equipment

- ✓ Additional saw blade
- ✓ Pneumatic spray mist lubrication system

Technical Data

3HPx2 60 Hz	220 3-Phase	3000 RPM	D: 16.5" d: 30/32mm	1.5CFM	90-120 psi	46"x197"x67"	2,960 lbs	2,390 lbs

Technical features and specifications are subject to change without prior notice.



ATechMachinery.com

309 Ridgmont Ave., Rockville, MD 20850 – USA
Ph.: +1-240-505-1967 Fax: +1-301-560-6627
info@ATechMachinery.com