

### GENERAL FEATURES

- Designed for straight and miter cut of aluminum and vinyl profiles at any desired length.
- Both heads tilt to 45° and 90° angles automatically, intermediate angles are set manually
- Different versions are available
- Stroke: min.450 mm (18"), max.4300 mm (169")
- The saw blade feed is hydro-pneumatic, and the cutting speed can be adjusted precisely according to the material to cut
- The operator control panel is touch screen
- Equipped with features like slicing, entering part quantity and programming
- Able to cut longer than the stroke
- For Ø 450 mm (18") saw blade size:
- 45° cutting capacity: 176×200 mm (7"x8")
- 90° cutting capacity: 176×285 mm (7"x11")
- Stroke: min.450 mm (18") , max.4000 mm (157")

### STANDARD EQUIPMENT

- 2 x 450 mm (18") carbide tipped saw blades
- Twin pneumatic horizontal clamps
- Air gun
- Additional conveyor on the movable unit
- Profile support device
- User's manual


### OPTIONAL EQUIPMENT

- Pneumatic spray mist lubrication system
- Chip collector





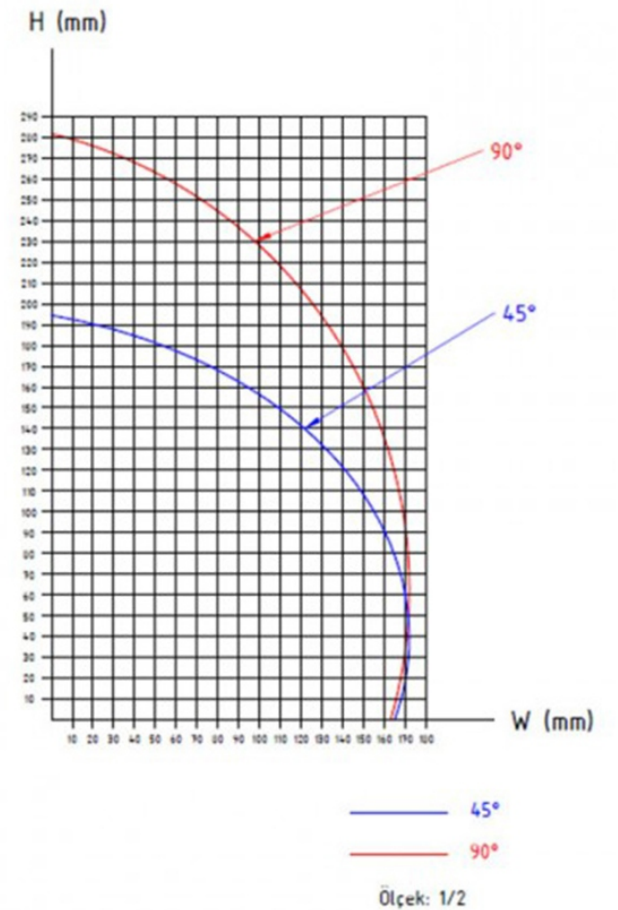


DOUBLE HEAD MITER SAW

### CUTTING DIAGRAM



### TECHNICAL TABLE

 2X2.2kW 400v 50/60 Hz	 3000 RPM	 D: 450 mm d: 30-32 mm	 6-8 Bar	 45 lt. Lt./min.
---	---	---	--	---